



*Ashwin*  
*Asha Sharma*  
*Chapter Coordinator*  
*Asha Cornell*

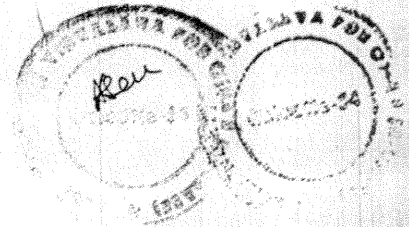

Sl.No.	Description.	Unit.	Quantity.	Rate./Unit.		Amount.	
				Rs.	P.	Rs.	P.
15	Artificial stone in floor, dado, stair-case etc. with cem. conc. (1:2:4) with stone chips with 3 mm. thick topping (high polishing grinding on this item is not permitted) with ordinary cement. 35 mm. thick.	sqm.	25.09	103.00		2,584.27	
16	Without integrated grills. Openable steel windows as per I.S. sizes with side hung shutters and horizontal bars.	sqm.	4.32	708.00		<u>3,058.56</u>	
(B)	Total			Rs.		99,009.98	

*Ashwini*  
*Asha Sharma*  
*Chapter Coordinator*  
*Asha Cornell*



Ground floor top to 1st. Floor top.

Sl.No.	Description.	Unit.	Quantity.	Rate./Unit.		Amount.	
				Rs.	P.	Rs.	P.
1	R.C.concrete (1:1.5:3) with graded stone chips (20 mm. down) excluding shuttering and reinforcement. (1 cement : 1.5 sand : 3 stone chips 20mm down).	cum.	17.00	2,709.00		46,053.00	
2	Reinforcement for reinforced concrete work in all sorts of structures including stirrups, binders etc. Including supply of rods, initial straightning and removal of loose rust (if necessary) cutting to requisite length, hooking and bending to correct shape, placing in proper position and binding with 16 gauge black annealed wire at every inter-section, complete as per drawing and direction.	Mt.	2.73	20,921.00		57,114.33	
3	Hire and labour charges for shuttering with centering and necessary staging upto 4 m. using approved stout props and thick hardwood planks of approved thickness with required bracing for concrete slabs, beams, columns, lintels, curved or straight including fitting, fixing and striking out after completion of work. Above 30 mm. to 37 mm. thk. wooden shuttering.	sqm.	180.24	109.00		19,646.16	
4	Brick work with 1st. Class bricks in cement mortar (1:5).	cum.	20.54	1,771.50		36,386.61	
5	Plaster with sand and cement mortar including rounding off and chamfering corners as directed and raking out joints or roughening of concrete surface by chamfering etc. including throating, nosing and drip course where necessary.						
	i)With 1:6 cement mortar. 20 mm. thick.	sqm.	116.38	52.75		6,139.05	
	ii)With 1:6 cement mortar. 15 mm. thick.	sqm.	130.55	46.10		6,018.36	