


Shaina
 Shaina
 Chapter Coordinator
 Asha Cornell




Sl.No.	Description.	Unit.	Quantity.	Rate./Unit.		Amount.	
				Rs.	P.	Rs.	P.
	iii) With 1:4 cement mortar. 6 mm. thick.	sqm.	61.13	42.75		2,613.31	
6	White washing / colour washing including cleaning and smoothing surface thoroughly (5 parts of stone lime and one part of shell lime should be used in the finishing coat). Three coats.	%sqm.	177.51	428.00		759.74	
7	Snow cem on outer surface of the wall including cleaning and smoothing surface Two coats.	sqm.	130.55	11.00		1,436.05	
8	Sal wood work in door frame fitted and fixed with com- plete including a protective coat of painting at the con- tact surface of the frame.	sqm.	0.13	28,980.00		3,767.40	
9	19 mm. thick panel (made of single plank) of door and window shutters with 1st. Class Indian teak.	sqm.	6.48	910.00		5,896.80	
10	M.S. works in framed gratings of round or square bars and frame work of M.S. flats (with the bars securedly fixed to the flat bar frame) with or without intermediate flat bar stiffener and fixed with necessary screws etc. complete as directed. (av. 17 Kg. per sqm.)	sqm.	4.64	408.42		1,895.07	
11	Supplying best Indian sheet glass panels set in putty and fitted and fixed with nails and putty complete. 3 mm. Thick (weighing 7.4 kg./sqm.)	sqm.	4.17	324.00		1,351.08	
12	Painting with best quality synthetic enamel paint of approved make and brand including smoothing surface by sand papering etc. including using of apprvd putty etc. on the surface, if necessary.						
	i) on timber surface (hi-gloss) Two coats (with any shade)	sqm.	6.48	35.20		228.10	
	ii) On steel surface. (hi-gloss) Two coats (with any shade)	sqm.	9.28	28.60		265.41	

Ashara

Asha Shalwa
Chapter Coordinator

Asha Cornell

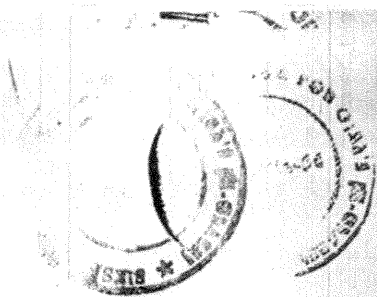

Sl.No.	Description.	Unit.	Quantity.	Rate./Unit.		Amount.	
				Rs.	P.	Rs.	P.
13	Artificial stone in floor, dado, stair-case etc. with cem. conc. (1:2:4) with stone chips with 3 mm. thick topping (high polishing grinding on this item is not permitted) with ordinary cement. 35 mm. thick.	sqm.	61.13	104.55		6,391.14	
14	Without integrated grills. Openable steel windows as per I.S. sizes with side hung shutters and horizontal bars.	sqm.	4.67	708.00		3,306.36	
		©	Total	Rs.		199,267.95	
				Rs.		369,423.17	
	Total (A)+(B)+©						46,177.90
	Add 12.5% for electricity & drainage, watersupply						
			Total	Rs.		415,601.06	

All rates are based on P.W.D. schedule of rates '99-2000, Presidency Circle - I.